

Product # \_\_\_\_\_ Type \_\_\_\_\_ Date \_\_\_\_\_

Project Name \_\_\_\_\_

Project Location \_\_\_\_\_ Prepared By \_\_\_\_\_

# Lytescaper™ LSP3

### Construction

- Housing is die-cast aluminum, heavy duty, structurally rigid and heat dissipating for longer lumen maintenance life-hours. Housing is finished fine texture metallic gray using polyester powder coat. Other optional finishes are available.
- Lens Door Assembly Minimum 1/8" thick tempered glass lens, thermal and impact resistant, sealed with doorframe and housing using extruded, memory retentive gasket. The doorframe is die-cast aluminum.

### Optical System




- Largest selection of optical choices shall be available to fit your applications. Please specify your selection from the ordering guide. Photometric Application Data table is provided additional tool for selecting appropriate optic system suitable to the application.
- Glare Control: Choice of external glare control accessories are available. Please select from the catalog ordering guide.

### Mounting

- Adjustable aim and lock type yoke is provided to mount on horizontal or vertical surface depending on application. The yoke is made of steel and finished powder coat to match luminaire finish.

### Product Applications

- Landscape lighting
- Building façade/Column light
- Statue/Art painting
- Display spot light
- Sign light
- Flag light
- Building wall washer
- Bridges: Pylon or Stay Cable
- Very cold environment flood light
- Very long throw narrow spot light
- Ceiling/Canopy mount aimable downlight

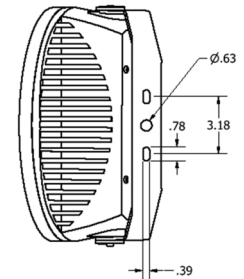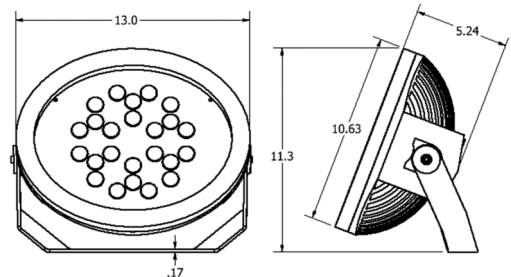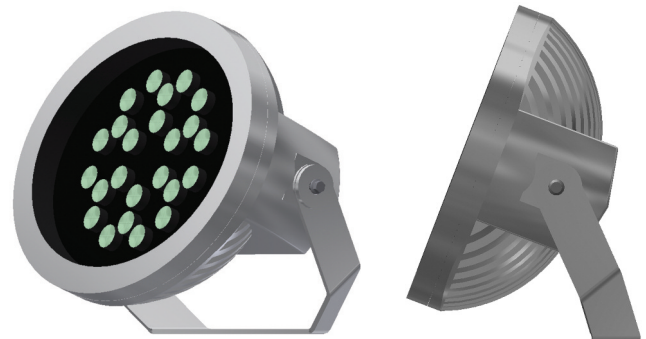

**Fixture EPA: 0.9sq. ft.**  
Weight: 15.0 lbs.

Made in the U.S.A: meets Buy America and ARRA requirements

### Ordering Guide

MODEL	TOTAL LED POWER	CCT COLOR TEMP	LIGHT LIGHT BEAM SPREAD	INPUT VAC	LIGHTING CONTROL	GLARE CONTROL
LSP3	105	CW	N11	U	DM	V
LSP3	50 = 50W 76 = 76W 105 = 105W	CW = 5K NW = 4K WW = 3K	N11 = 11° Narrow M26 = 26° Medium W46 = 46° Wide ELH = Ellip. Hor. ELV = Ellip. Vert. ASY = Asym. Beam SQR = Square Beam	U = Universal 110V to 277V	DM = Dimming 1-10V, Interface only	V = Visor H = Hood CL = Cross Louver

Note: North Star Lighting reserves the right to Modify Specifications without notice.

# Lytescaper™ LSP3

## Electrical Components

- AlphaLED™ Light Engine: LED Module is configured with Cree XPG-2 LEDs. The light engine is mounted directly on the highly conductive aluminum die-cast housing. These LEDs are operating below 85°C case temperature and deliver superior maintained illumination per LM80 L70 standards. Please refer LED Performance Data table for the targeted LED illumination life at 25°C to 40° C luminaire outside ambient temperature. The choice of color temperatures (3000K, 4000K and 5000K) are available to match your intended application.
- LED Drivers: UL/CSA recognized component to meet UL8750 & EN61347 (USR/CNR -E328335). Suitable for input power at 120-277VAC 50/60Hz.
- Power connection: A 6 foot long outdoor rated water resistant cable shall be provided for the electrical power connections to the nearest junction box (by others).

## Mounting

- Adjustable aim and lock is provided to mount on horizontal or vertical surface depending on application. The yoke is made of steel and finished powder coat to match luminaire finish.

## Safety Compliance


- UL 1598 and CSA C22.2 NO. 250.0 standards. Suitable for indoor/outdoor wet (IP65) or damp location use.

## Targeted LED Performance


Luminaire Data @ 25°C

CREE LM80 Projected Life Hours Per IESNA TM21


Model	LED Color Temp	LED Watts	Output Lumens	At 25°C, Luminaire Ambient		At 40°C, Luminaire Ambient	
				L70 (9k) Life	TS-°C	L70 (9k) Life	TS-°C
LSP3	5000	50	5088	Greater than 51,400	Under 85	Greater than 51,400	Below 85
	4000		4176				
	3000		3456				
	5000	76	7128	Greater than 51,400	Under 85	Greater than 51,400	Below 85
	4000		5856				
	3000		4800				
	5000	105	8592	Greater than 51,400	Under 85	Greater than 51,400	Below 85
	4000		7056				
	3000		5808				

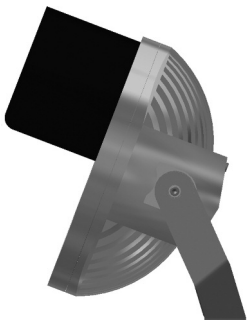

V - Visor

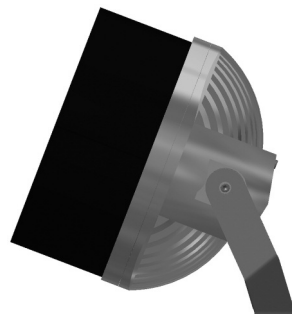

H - Hood

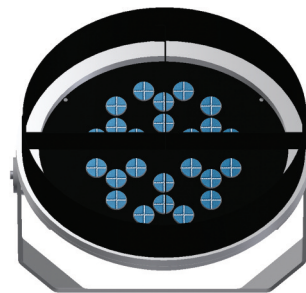

CL - Cross Louver


## Photometric Application Data

Performance Values NEMA Classification	Optic N11 1HX1V	Optic M26 3HX3V	Optic W46 4HX4V	Optic ELH 4VX2H	Optic ELV 2HX4V
Maximum Center Candela Cd-max	220927	49052	13817	45626	45626
Maximum Center Fc @ 5 ft Fc5	8837	1962	553	1825	1825
Maximum Center Fc @ 10 ft - Fc10	2209	491	138	456	456
Beam Angle @ 50% of Max. Fc - Ba degrees	8°	20°	44°	37X13	37X13
Field Angle @ 10% of Max Fc - Fa degrees	15°	40°	65°	60X28	28X60
Beam Diameter in feet @ 5 ft - Bd5	0.70	1.76	4.04	3.35X1.14	1.14X3.35
Field Diameter in feet @ 5 ft - Fd5	1.32	3.64	6.37	5.77X2.5	2.5X5.77
Beam Diameter in feet @ 105 ft - Bd10	1.4	3.53	8.08	7.70X2.28	2.28X7.70
Field Diameter in feet @ 10 ft - Fd10	2.63	7.28	12.74	14.54X5.0	5.0X14.54

## Photometric Conversion Table

To be used to convert from photometry of 18W, 5000K to other wattages and color temperature LEDs

Model	LED Color Temp	LED Watts	Output Lumens	Conversion Multiplier-for candela values and foot candle values-all optics options
LSP3	5000	50	5088	0.592
	4000		4176	0.486
	3000		3456	0.402
	5000	76	7128	0.830
	4000		5856	0.682
	3000		4800	0.559
	5000	105	8592	1.000
	4000		7056	0.821
	3000		5808	0.676

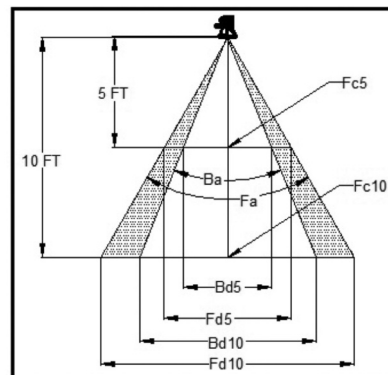

## Distance Multipliers (Adjusted from 10 ft values)

Distance in Feet	Multiplier for Beam or Field	Multiplier for Footcandle values
10	1.00	1.0000
15	1.50	0.4444
20	2.00	0.2500
25	2.50	0.1600
50	5.00	0.0400
75	7.50	0.0178
100	10.00	0.0100
150	15.00	0.0044